
TLKIT4 Hybrid Display

Setup Instructions for TLKIT4

VERTICAL SUPPORTS Each 30' Kit includes: 6 posts, 6 feet, 24 screws









Connect feet to vertical posts with provided screws using the provided allen wrench. There are four screws per stand.



Remove screw from inside bottom post, slide top post onto top of bottom post and screw in place. Repeat with all posts.

MAIN HORIZONTAL SUPPORTS Each 30' Kit includes: 6 main bars (2 pieces per bar), 4 joiner bars, 6 header panel retainers











Remove the screw, slide into second half of the bar, replace screw and tighten with tool. **Insert header panel retainers for header now.**








Slide graphics into grooves of the horizontal top bars. Then connect top horizontal bars into vertical posts. Repeat with joiner bars.









END PANELS - Each 30' Kit includes: 2 graphics & 4 bars






Fabric Ends: insert graphics the same way as main panel. Slide edges of graphic into top & bottom bars. Then insert bars into posts on sides of the display.

TOP WAVE -Each 30' Kit includes: 18 bars, 6 posts, 6 screws & 3 fabric cover



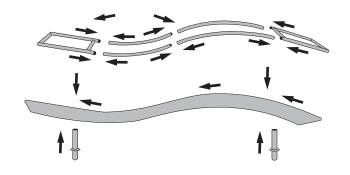



The pieces are labeled so they easily snap together.









Once the wave top hardware is together slide the fabric cover over like a pillow case and zip up. After cover is on the hardware, push screws through the top provided holes and screw into posts on bottom side.





Now insert the wave top assembly into the top of the vertical posts.

SLAT WALLS Each 30' Kit includes: 4 slat walls and 8 bolts



Slat walls can be attached at this time by pushing the screws that you attached in step 2 through the holes in the slat walls then using the bolt top to secure.



HEADER Each 30' Kit includes: 3 acyrlic headers

You can attach the header into the panel retainers that you inserted into the top horizontal bar now. These simply slide in and tighten.



STEP 6

STEP 7

LIGHTS Each 30' Kit includes: 6 lights, 6 light cords & 6 light clips

Slide the light clip into the bottom of the lights. Then slide the light into the top horizontal bar as shown.





TABLEEach 30' includes: 6 posts, 12 screws, 3 bottom plates, 3 acrylic top plate, 6 large bolts, 6 wing nuts & 3 clamps











Assemble table legs together with the top and bottom base plates and screws. Then attach acrylic table top with the large bolts and wing nuts to top of base plate on legs. Attach clamp to back of acrylic table top for insertion into vertical posts.

SHELVES Each 30' includes: 12 acrylic shelves, 12 brackets, 18 large bolts & 18 wing nuts







Attach brackets into vertical posts, tighten then place acrylic shelves on top and secure using large bolts and wing nuts.



Your display should look something like this when all together.

TL1007 Monitor Mount for 30-50 LCD

Each Kit includes: 1 monitor mount w/ bars attached, 12 screws &16 washers


















Safety Warning: Be careful to make sure there are no missing or defective parts. Never use defective parts. Improper installation may cause damage or serious injury.

Installing bars to your LCD monitor

1) To ensure optimal installation, this kit includes various screws of different diameters and lengths.

2) Place your TV screen down on a soft, flat surface and locate the threaded mounting points that are located on the back of the display.

- **3)** Determine which screw (A/B/C) is of the correct length by carefully inserting a straw or toothpick and mark how deep the mounting point is.
- **4)** If your display has a curved back or a recessed thread mounting point, a spacer (F) must be used.
- 5) Place the spacer (F) between the mounting bracket and display.
- **6)** According to the size of the display's hole, choose the corresponding screw and hole on the rectangle washer, then thread them in line.



Notice:

First, if the TV back is accurate you will need to use (F), if it's flat that is unnecessary. Second, the choice of screw (A/B/C) should be according to the size and depth of the install aperture in the back of the TV.

Installing monitor mount to display

Once the graphic has been installed into the frame, pull out the desired area where the monitor mount will be installed. Insert the support bars into the grooves of the display post and lock using the tool (when complete is should look like the photo below).








Installing monitor to monitor mount

Mount the monitor by carefully lining up the bracket bars on the back of the monitor onto the horizontal bars just installed on the frame. The monitor is attached correctly when you hear it click. To remove the monitor, pull down strings to release grip.







TLKIT4 Hybrid Display Parts List for TLKIT4























Counters

See setup Instructions for monitor mount on page 4