Formulate Designer Series 30' Backwall - Kit 04

FMLT-DS-30-04

Formulate[®] Designer Series 30ft displays have unique stylistic features and shapes, are portable and easy to assemble. The aluminum tube frame features snap-buttons and/or spigot connections and zipper pillowcase fabric graphics. All displays come in portable, wheeled transit cases. Simply pull the pillowcase fabric graphic(s) over the frame and zip.



We are continually improving and modifying our product range and reserve the right to vary the specifications without prior notice. All dimensions and weights quoted are approximate and we accept no responsibility for variance. E&OE. See Graphic Templates for graphic bleed specifications.

features and benefits:

- Premium aluminum tube frames with snap
- button/ spigot assembly
- Vertical curved shaped frame
- Easy to store and ship
- Quick to set up
- Weighted feet for added stability

dimensions:

Hardware Graphic Assembled unit: Refer to related graphic template for 350.05" w x 91.84" h x 23.97" d more information. 8891mm(w) x 2333mm(h) x 609mm(d) Visit: www.exhibitors-handbook.com/ Approximate weight with cases: 118 lbs / 53.5 kgs graphic-templates Shipping Packing case(s): 2 OCE Shipping dimensions: 41"l x 18"h x 17"d 1042mm(l) x 458mm(h) x 432mm(d) Approximate total shipping weight (includes cases & graphics): 149 lbs / 67.6 kgs additional information: Graphic material:

- Zipper pillowcase fabric graphic


manufacturer defects

- Lifetime limited hardware warranty against




dye-sublimation zipper pillowcase fabric

Included In Your Kit

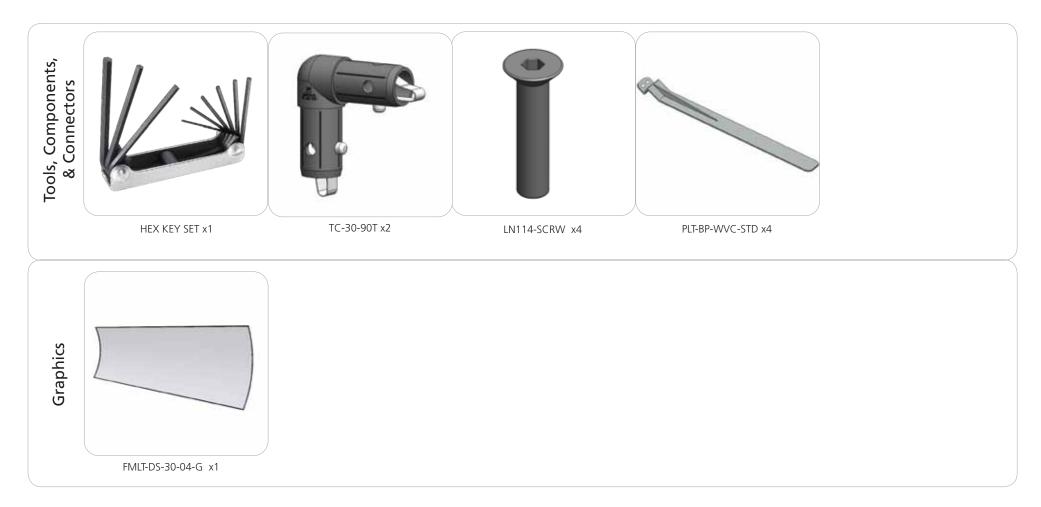


Included In Your Kit

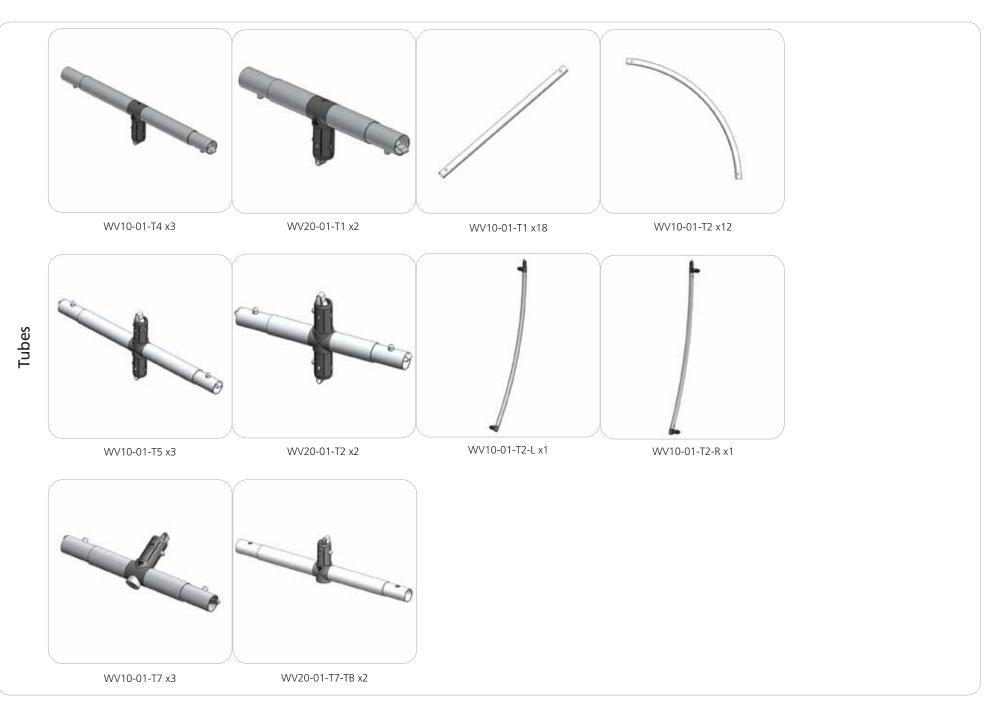

Connection Methods


Formulate[™] structures use a number of different yet simple connection methods. Your kit will include one or more of the connection methods shown below. Steps within the Kit Assembly will reference a specific method for each connection point.

Connection Method 1: ES30 / ES50 / ES75



Compress the unlocked connector and slide one tube onto each end. Lock both screws carefully using your hex key tool. Be sure to lock securely, but do not over tighten.

Connection Method 2: Snap Buttons & Swage



Locate the snap button on the connector or swage tube. Locate the hole on the corresponding tube. Press the snap button with your thumb and slide the tube and connector together so that the snap button snaps fully into the lock hole. To disassemble, press the snap button and pull apart.

Connection Method 3: ES30-90B / ES30-I / ES30-C




Compress one unlocked end of the connector and slide it through one tube end. Compress the other end of the connector and slide the second tube on. Lock both screws carefully using your hex key tool. Be sure to lock securely, but do not over tighten.

Connection Method 4: Tube Clamps




Be sure to fully assemble all frames before using clamps. With the clamp unlocked, place one tube of the first frame into the mouth of the clamp. Place the second tube (if applicable) into the second mouth of the clamp. With both frame's tubes in the clamp, be sure to lock securely, but do not over tighten.

Exploded View

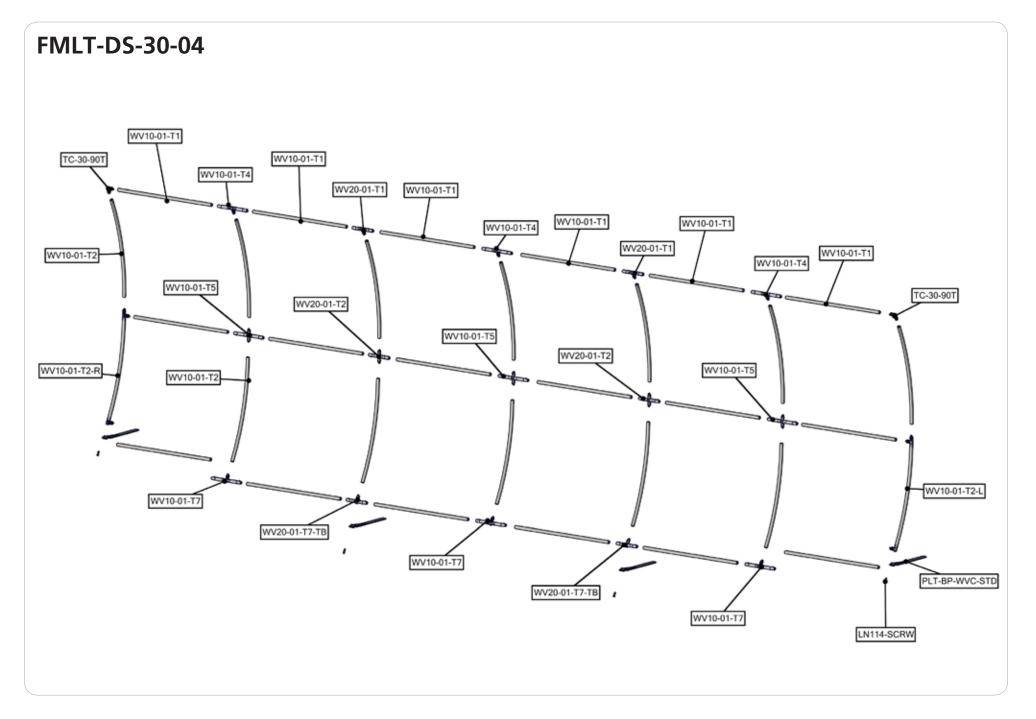

Labeling Diagram

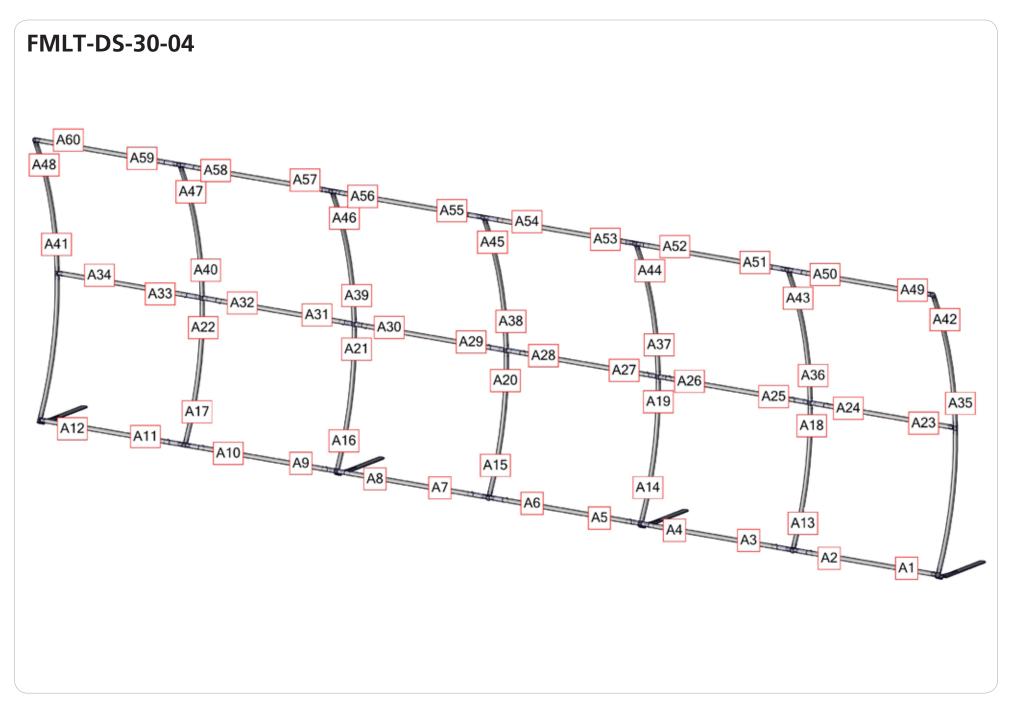



Kit Assembly


Step by Step

Step 1.

Assemble the frame laid out on the floor according to the Labeling Diagram and the Exploded View.








Step 2.

Apply the pillowcase fabric graphic on the frame by pulling it over the top.

Multiple zippers are located at the bottom end.





Step 3.


Attach the stabilizing bases on the protruding plastic connectors of the frame. Using the provided hand-tool, tighten the screw for a secure and snug fit. Lift and stand you structure upright.

Please reference Connection Method 1 for more details.





Step 4. Setup is complete.



Your FIRST AND ONLY choice for trade show displays since 1994.

