


ASSEMBLY HARDWARE

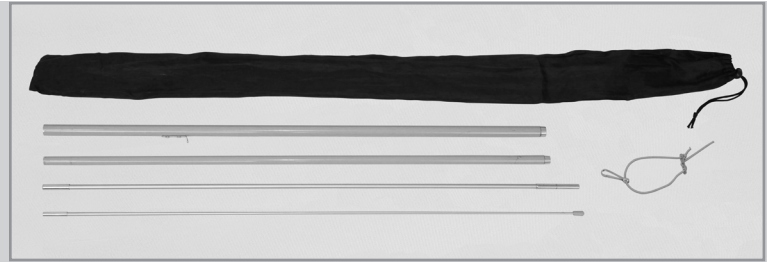

NOTE - THE AMOUNT OF POLES ARE DETERMINED BY THE SIZE OF THE BOWFLAG®

Wind Speed Recommendations:


- Bowflag® Basic SR:
25-30mph (6bft)
- Bowflag® Basic DS:
13-17mph (4bft)



Spring Snap



Bungee Cord
Tensioner



Bungee Cord




Tip



Fastener

ASSEMBLY

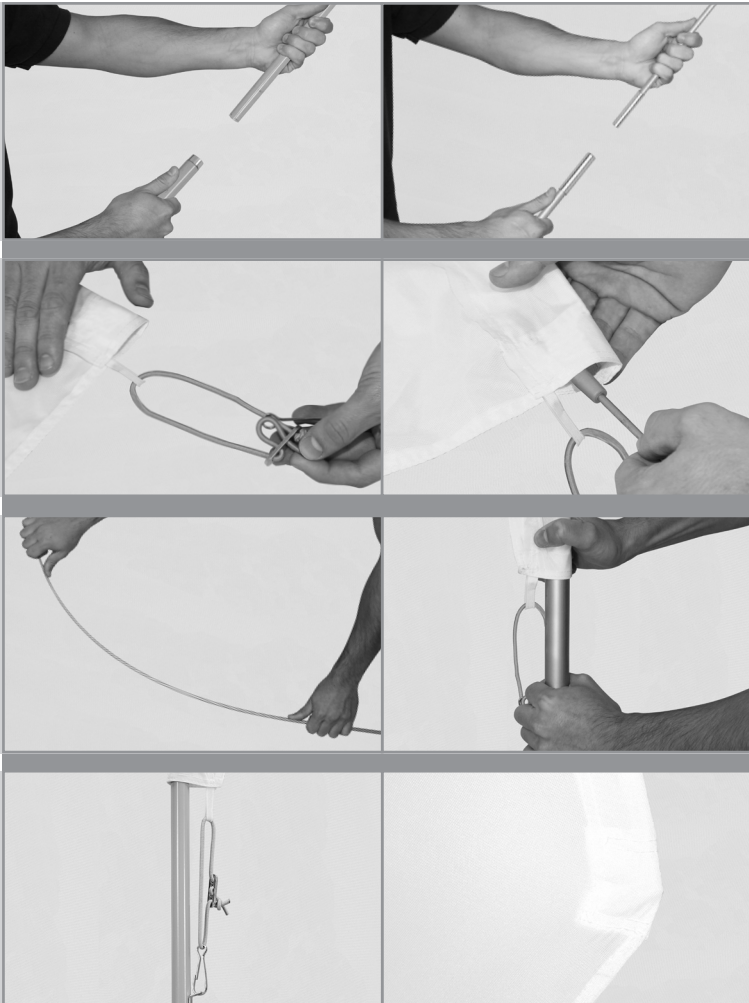

1. Assemble the pole set. The poles will be assembled from largest diameter pole on the bottom to the smallest diameter pole at the top. There is only one correct order the poles can be assembled. For reference the top pole is a flexible fiberglass pole with a tip and the bottom pole will have an attached fastener.

2. Remove one end of the bungee cord from the tensioner and place it through the tab on the print. After going through the tab, feed the bungee cord through the spring snap before reattaching it to the tensioner.

3. Insert assembled pole set into the print pole sleeve.

4. The flexible fiberglass pole will curve to the shape when the flag is fully taut. Pull the print and the pole sleeve downwards towards the fastener located on the bottom pole.

5. Attach spring snap to the fastener and mount the whole assembly using one of the available bases. Make sure the tip of the flexible fiberglass pole is fully inserted into the reinforced pole tip. Adjust the bungee cord and tensioner so print is fully taut when the spring snap is attached to the fastener.



The Bowflag® Basic has been wind tunnel tested in order to provide our customers with the most durable flag system, even when using double-sided flags. Do not fly your Bowflag® in extreme winds (any wind speed exceeding what is listed above) and/or thunderstorms. Do not use near overhead wires. User must read and observe construction sheet. If this is not done correctly it may result in damage to the unit, injury, or death, and all warranties will be void.

